

GLOBAL SYN-TU

Product Specification Sheet







R USES


- Landscape
- Lawns
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

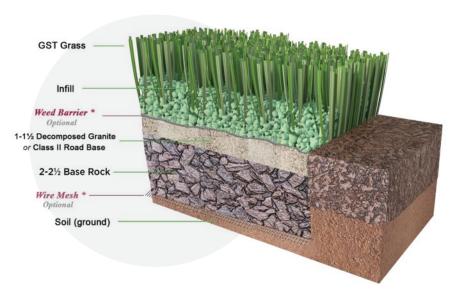

VALLEY BLADE

SPECIFICATIONS

Pile Height: 1-1/2"

Turf Gauge: 3/8"

Face Weight: 51 oz./yd²

Backing Weight: 26 oz./yd2

Total Weight: **77 oz./yd**²

Stitch Rate: 14/10cm

Stitches/M2: 14700

Material/Dtex: PE9000 + PP4000

Color: Field Green & Olive Green with Brown

and Green Thatching

Type Of Fiber: PE monofilament and PP Curled

Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 14+ lb/force (ASTM D1335)

Blade Type: Valley Blade

Permeability: 84.6 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >170 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 790 lbs





